

BRILLIANCE LED DIMMER



DESCRIPTION


The Brilliance LED Dimmer provides 12 VAC dimming for up to 120 Watts. This unit can be mounted next to the 12 VAC transformer or anywhere in the field, and is compatible with all Brilliance LED lamps. Note that the Dimmer range may vary depending upon load that is applied. Made in America.

BRILLIANCE LED DIMMER FEATURES

- Installs in single-gang deep junction box on the low-voltage side of magnetic step-down transformer
- Includes: Dimmer Plate; Gasket; Wire Nuts; Plate Screws; Spare Fuse; Set Up Instructions

BRILLIANCE LED DIMMER SPECS



Wattage	120
Operating Range	12-15 VAC
Capacity	10 Amps
Minimum Load	None
IP	63
Warranty (years)	3

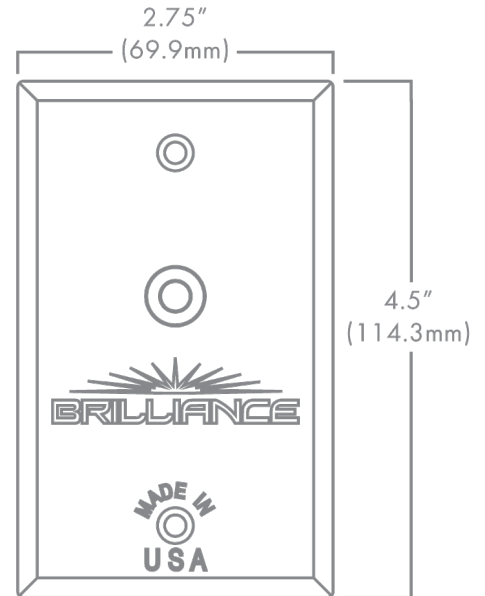

Part Number:

12-VAC-BRILLIANCE-DIMMER-SWITCH

WIRING DIAGRAM

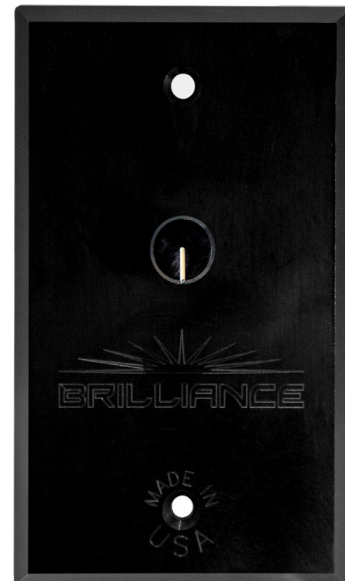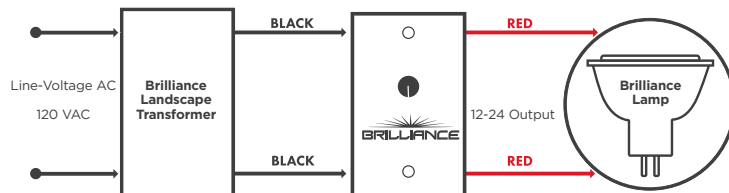

TECHNICAL REQUIREMENTS: Always use the supplied gasket to protect against water ingress. In applications where the environment can be extremely wet, we recommend using a cover to protect against water ingress.