


HIDDEN TORQUE HINGE



HG-TU


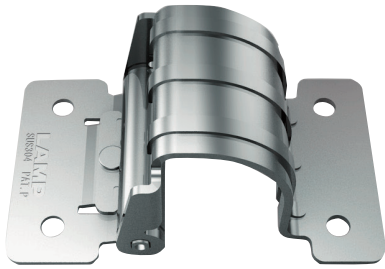


- Installation on the inside of the door.
- Can be used both for horizontal and vertical applications.
- A torque-free type (HG-TUF) is available. The total torque force can be adjusted by using both torque and torque-free types conjointly.




Note:

- Initial torque may vary -20%~+40%.
- Do not lubricate.
- For indoor use only.

Installation

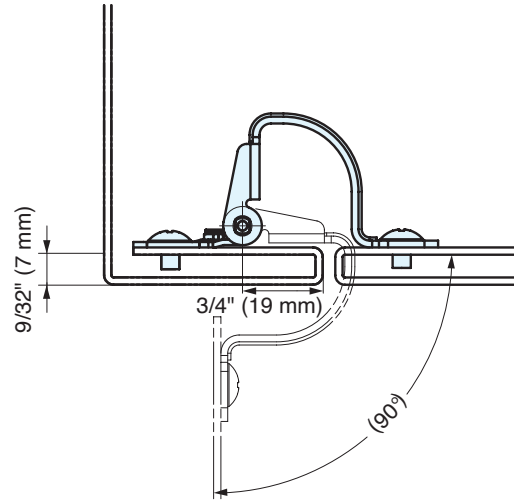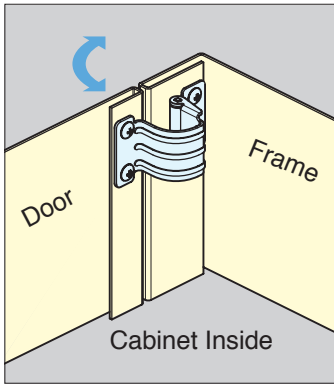

Application Example

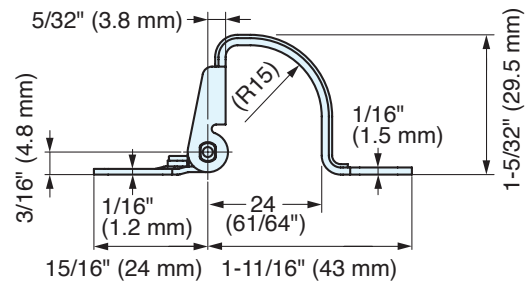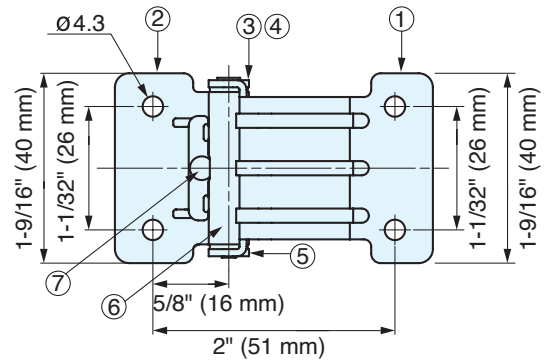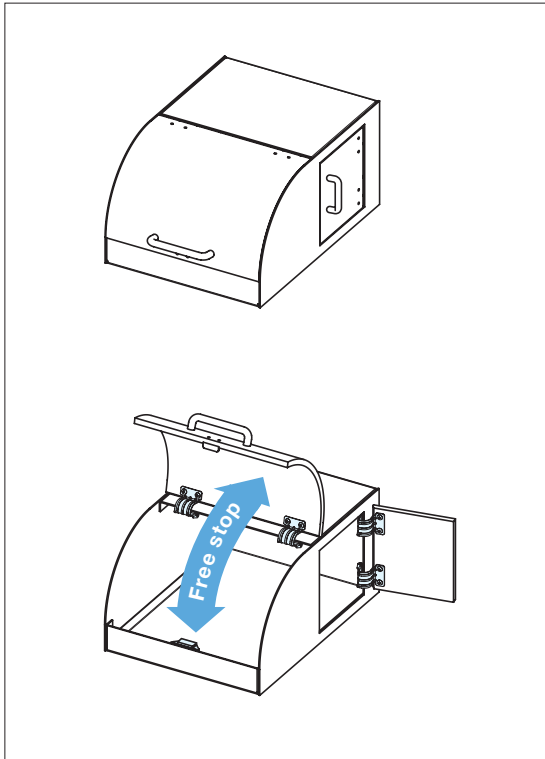

Item No.	Torque per piece (kgf-cm)	Weight (g)	Box (pcs)	Carton (pcs)
HG-TU03	3.6 (3.1 lbs-in)	50	20	200
HG-TU07	7.1 (6.2 lbs-in)			
HG-TUF	Torque-Free			

No.	Part Name	Material	Finish
①	Body	304 Stainless Steel	Polished
②	Base		
③	Fixing Tube	Polyacetal	Black
④	Fixing Tube		
⑤	Shaft	303 Stainless Steel	-
⑥	Press Washer	304 Stainless Steel	Polished
⑦	Pin		-