




# Model LA1815

# Model LA1815

Lightweight Aluminum Track  
 Static load rating up to 18lbs.  
 Dynamic load rating up to 7lbs.

**APPLICATIONS:**  
 Light weight sliding doors or panels.

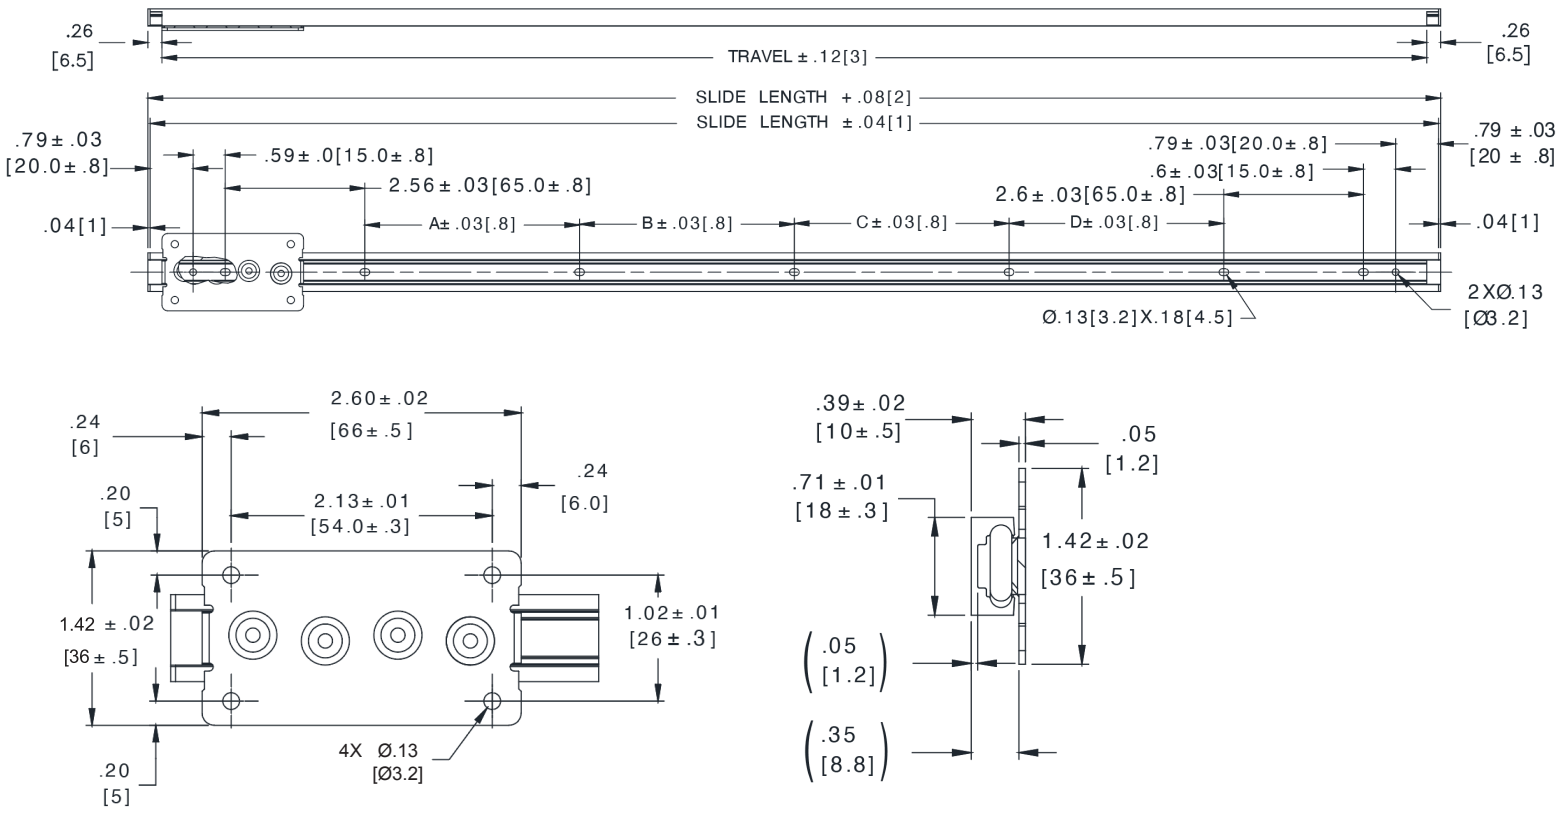


**Inch [mm]**

	Slide Length	Slide Travel	A	B	C	D	Weight (g)
LA1815-20	7.87 [200.0]	4.84 [123]	-	-	-	-	63
LA1815-25	9.84 [250.0]	6.81 [173]	1.97 [50]	-	-	-	71
LA1815-30	11.81 [300.0]	8.78 [223]	3.94 [100]	-	-	-	79
LA1815-35	13.78 [350.0]	10.75 [273]	2.95 [75]	2.95 [75]	-	-	87
LA1815-40	15.75 [400.0]	12.72 [323]	3.94 [100]	3.94 [100]	-	-	94
LA1815-45	17.72 [450.0]	14.69 [373]	3.94 [100]	1.97 [50]	3.94 [100]	-	102
LA1815-50	19.69 [500.0]	16.65 [423]	3.94 [100]	3.94 [100]	3.94 [100]	-	110
LA1815-55	21.65 [550.0]	18.62 [473]	3.94 [100]	2.95 [75]	2.95 [75]	3.94 [100]	118
LA1815-60	23.62 [600.0]	20.59 [523]	3.94 [100]	3.94 [100]	3.94 [100]	3.94 [100]	125

**Load Capacity**

Static Load (lbs.)		
Pa	Pb	Pc
18.0	11.2	11.2
Dynamic Load (lbs.)		
Pa	Pb	Pc
7.0	2.2	2.2

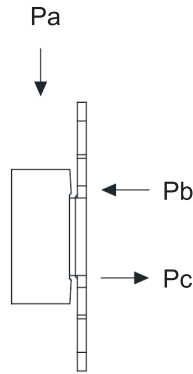

**Material Construction**

<b>Track (Cabinet Member)</b>	Aluminum
<b>Plate</b>	Mild Steel w/ Zinc Plating
<b>Bearing Roller (Metal)</b>	Mild Steel w/ Zinc Plating
<b>Bearing Roller (Resin)</b>	Polyacetal
<b>Stopper</b>	Mild Steel w/ Zinc Plating
<b>Stop Bumper</b>	Polyacetal

**Finish**

<b>Cabinet Member</b>	Anodic Oxide Coating
<b>Plate &amp; Stopper</b>	Electro-Zinc Plated, Chromate Coated.

**Mounting:** Horizontal or Vertical

**Max. Load:** 18lbs.

**Dynamic Load:** 7lbs.

**Lengths:** Even lengths 8" - 24" [200 mm - 600 mm]

**Customer Supplied Hardware**

Cabinet Member: #4 [M3] Screws  
(head height .08 [2] or less)

Carriage: #4 [M3] Screws

**Accuride®**

ACCURIDE INTERNATIONAL INC.

12311 Shoemaker Avenue  
Santa Fe Springs, CA 90670

TEL (562) 903-0200

FAX (562) 903-0208

www accuride.com

Manufacturing, Engineering, and Sales

United States • Germany • Japan • Mexico • United Kingdom • China