

SEQUOIA G4 Bi-Pin 7" Path Light




DESCRIPTION

The Sequoia 7" Path Light comes complete with a fully adjustable reflector top. It is available in a standard 18" fixed stem or a 17" to 28" adjustable stem.

SEQUOIA PATH LIGHT

Use	Path, Area, and Garden Accent Lighting		
Finish	Brass, Copper, or Brass w/ Black Cerakote®		
Includes	ABS Mounting Stake, LightingShrink Professional Crimp, and Heat Shrink Cable Connector		
Order Without Lamp	Fits G4 Bi-Pin	FIXED SEQUOIA-PL-7-G4-CU-F-NL SEQUOIA-PL-7-G4-BR-F-NL SEQUOIA-PL-7-G4-BR-BLK-F-NL	ADJUSTABLE SEQUOIA-PL-7-G4-CU-A-NL SEQUOIA-PL-7-G4-BR-A-NL SEQUOIA-PL-7-G4-BR-BLK-A-NL

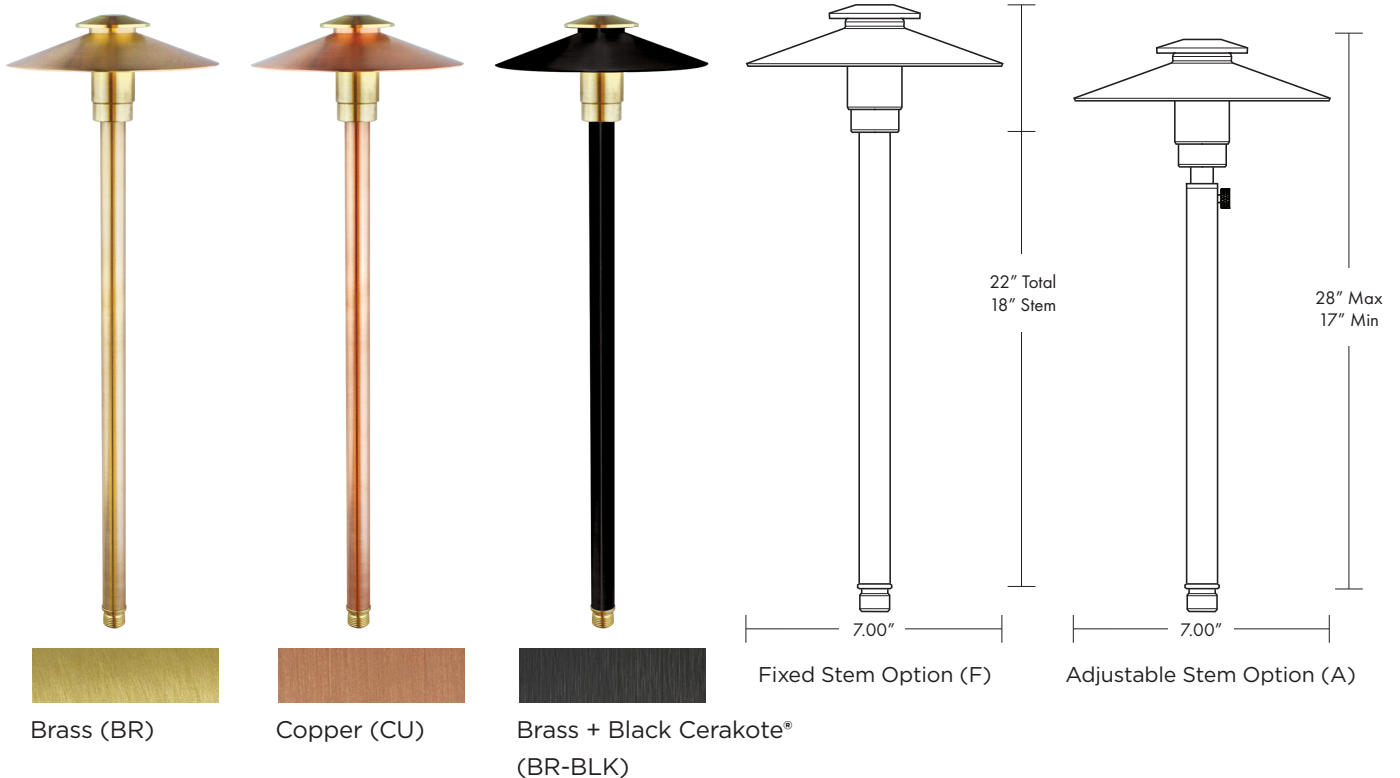

WILDLIFE LIGHTING CERTIFICATION PROGRAM

Certification Number: 2019-268

Certification Requirements: Amber LED; Must be downward directed; Maximum mounting height of 24" from the ground; Additional shielding may be necessary if visible from the beach





Application picture shown as **SEQUOIA-PL-7-G4-CU-F** (not in Amber).

SOFT SOIL APPLICATIONS: INSTALLING THE GROUND STAKE & FIXTURE

1. Connect the power cable from the fixture body to the landscape cable.
2. Lay the power cable into the slotted relief on the stake.
3. Press the fixture and stake into the ground.
4. Use a level to ensure the top of the stake is level with the ground.

HARD SOIL APPLICATIONS: INSTALLING THE GROUND STAKE & FIXTURE

1. Unscrew the fixture body from the stake.
2. Dig a hole approximately 4" wide by 10" deep and gently tap the stake into the ground with a rubber mallet.
3. Use a level to ensure the top of the stake is level with the ground.
4. Reinstall the fixture body onto the stake and lay the power cable into the slotted relief on the stake.
5. Connect the power cable from the fixture body to the landscape cable.

ADJUSTING THE FIXTURE

1. Turn the threaded ring counter clockwise to loosen the lid.
2. Find the right light pattern by moving the lid up and down on the stem.
3. Turn the threaded ring clockwise to lock the lid into the preferred position.
4. For adjustable stem models, adjust the stem length by loosening the set screw, adjusting the stem height, and tightening the set screw to hold it in place.

INSTALLING THE LAMP

1. Loosen the threaded jam nut toward the stem.
2. Unscrew the lid from the stem.
3. Install the Beacon G4 Bi-Pin into the socket.
4. Screw the lid onto the stem.
5. Adjust the threaded ring until you achieve the light pattern you want.

WILDLIFE LIGHTING CERTIFICATION PROGRAM

Certification Number: 2019-268

Certification Requirements: Amber LED; Must be downward directed;
Maximum mounting height of 24" from the ground; Additional shielding may
be necessary if visible from the beach

