

BVM Series

VERTICAL MULTISTAGE PUMPS

FLOW RANGES 1,3,5,10,15,20,33,45,64,90



MADE TO SUPPLY WATER

Pentair Berkeley® BVM and BVMX Pumps are non-self priming vertical multistage pumps of in-line design with multiple connection options available to meet your water supply needs.

Pump stub shaft and motor shaft of the NEMA standard motor are directly close coupled.

TECHNICAL SPECIFICATIONS


- ◆ Flow: up to 560 GPM
- ◆ Head: up to 1000 ft
- ◆ Liquid Temp: 5 °F to 248 °F
- ◆ Flanges connection: ANSI Class 250/300
- ◆ Cartridge mechanical seal: SiC/SiC/EPDM or Viton™
- ◆ Motor: 50/60 Hz
- ◆ Premium efficient motors
- ◆ 200 to 575 Volts
- ◆ Open drip or TEFC enclosures
- ◆ Up to 60 HP

APPLICATIONS

- ◆ Water supply
- ◆ Pressure boosting systems
- ◆ Water treatment/ filtration
- ◆ Irrigation
- ◆ High pressure washes
- ◆ Liquid transfer
- ◆ Firefighting systems
- ◆ Boiler feed
- ◆ Jockey pumps



304 & 316 SS Models

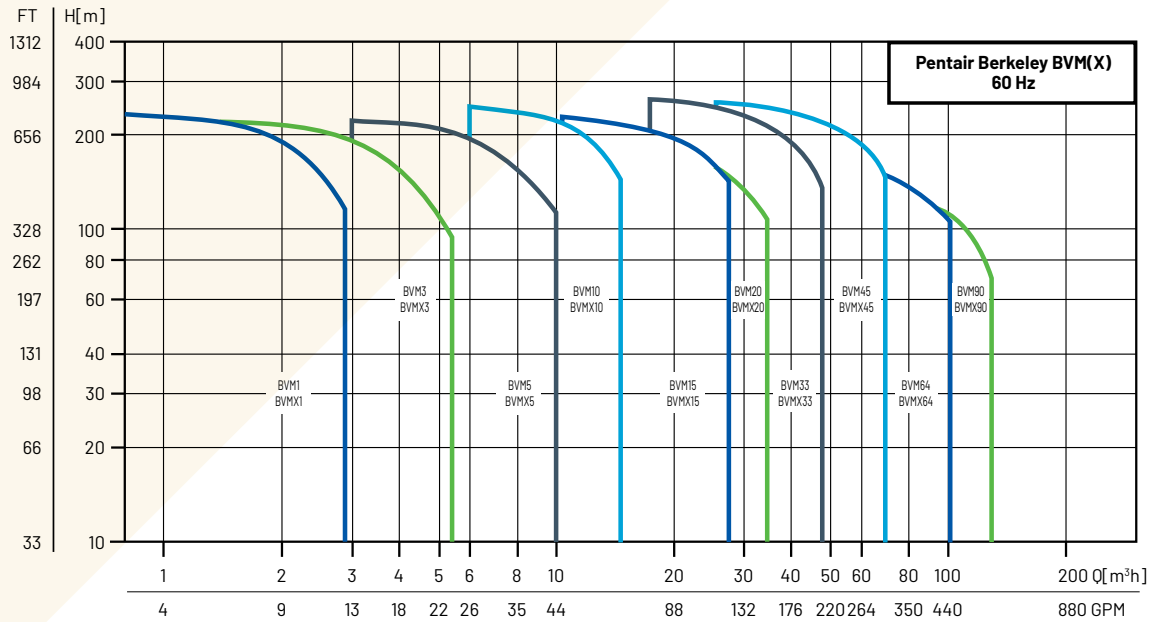

Premium Efficiency Motors
Premium efficient motors are standard.



Cartridge Mechanical Seal
Designed for easy replacement without dismantling the pump.

Stainless Steel Construction
Impellers and diffusers in AISI 304 (Berkeley BVM) or AISI 316 (Berkeley BVMX).

Multiple Connection Options
Flanged, NPT or grooved connections.



293 Wright Street | Delavan, WI 53115 | United States | 888-237-5353 | F: 800-321-8793 | pentair.com/berkeley

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

Viton is a trademark of The Chemours Company FC, LLC.

B11380BK (08-12-20) ©2020 Pentair. All Rights Reserved.