

# CARLSBAD MR16 WELL LIGHT




## DESCRIPTION

The Carlsbad Well Light is fitted for any MR16 lamp and comes to life with the Brilliance Chameleon MR16. The flat glass top comes in a brass finish.

## CARLSBAD WELL LIGHT

Use	<b>Well Lighting &amp; Underground Up Lighting</b>	
Finish	<b>Brass, Copper, or Brass w/ Black Cerakote®</b>	
Includes	<b>LightingShrink Professional Crimp and Heat Shrink Cable Connector, Honeycomb Louver</b>	
Warranty	<b>Lifetime Warranty on National Parks Series Fixtures</b>	
Order With Lamp	<b>MR16, 4W, 2700K, 30°</b>	CARLSBAD-UG-MR16-BR CARLSBAD-UG-MR16-CU CARLSBAD-UG-MR16-BR-BLK
Order Without Lamp	<b>Fits Chameleon MR16, MR16</b>	CARLSBAD-UG-MR16-BR-NL CARLSBAD-UG-MR16-CU-NL CARLSBAD-UG-MR16-BR-BLK-NL



2.25"




Brass (BR)



Copper (CU)



Brass + Black Cerakote®  
(BR-BLK)

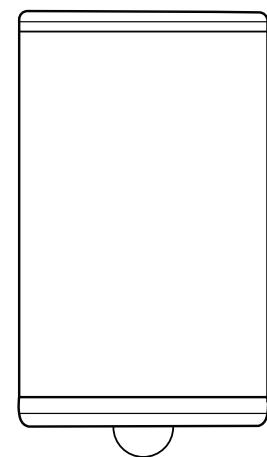

3.75"

2.25"



**CARLSBAD-UG-MR16-CU**

#### **INSTALLING THE LAMP**

1. Remove the rear cap and pull out the spring.
2. Set the MR16 lamp on top of the spring and plug it into the socket.
3. Insert this assembly into the fixture body with the front of the lamp toward the lens.
4. Screw the back cap onto the fixture body and hand tighten.

#### **INSTALLING THE FIXTURE**

1. Dig a hole in the ground approximately 8" wide by 10" deep.
2. Connect the power cable to the fixture, leaving 2 feet of wire coiled in the bottom of the fixture for future service.
3. Pour 5" of pea gravel in the hole.
4. Place the fixture in the center of the hole.
5. Add more pea gravel to fill the hole 1" before the fixture lip. This allows for proper drainage around the fixture.
6. Apply glass wax on top of the lens to protect against standing water.