PRO-SOURCE® Pumper Series

Engine-driven pumps



Lightweight, corrosion-resistant, engineered composite pump construction make this enginedriven pump extremely versatile for applications where electrical power is not available.

Powered by a powerful 6-1/2 HP,
PowerPro 4-cycle gasoline engine,
rated for continuous-duty, equipped
with professional-grade features like
an automatic low-oil safety cut, manual
throttle, choke and shut-off controls.

Securely mounted within a rugged steel framed rollcage, reinforced with steel cross-members, coated for corrosion resistance, equipped with noisedampening, non-slip rubber feet.

Suction lift capability of 25 feet.

APPLICATIONS

Water Transfer and Supply Sprinkler Turf Irrigation

Dewatering

Fire Protection

Agriculture, Light Commercial and Marine

ORDERING INFORMATION Catalog Number HP Description Pipe Tapping Sizes Approx. Wt. Lbs./Kg EDP55RV 6-1/2 Engine-driven pump w/rollcage 2" NPT 2" NPT 46/20.9

ACCESSORIES		
Catalog Number	Description	Approx. Wt. Lbs./Kg
FP2735	2" x 15' Suction Hose Kit	15/6.8
FP2731	2" x 25' Discharge Hose Kit	6/2.7



FP2735 Suction Hose Kit



FP2731 Discharge Hose Kit

SPECIFICATIONS

Body: Reinforced corrosion-resistant thermoplastic

Impeller: Polymer

Diffuser: Reinforced corrosion-resistant thermoplastic

Seals: Viton mechanical

O-rings: Viton
Check Valve: Viton

Rollcage: Coated steel frame with cross-member and stay-in-place (no-slip) rubber feet

Engine: 6-1/2 HP

Dimensions: 21"H x 17"D x 21"L **Fasteners:** 300 grade stainless steel

FEATURES

Rugged Lightweight Design

Corrosion-Resistant Composite Pump Construction

Chemical-Resistant Viton Seals, O-rings with Stainless Steel Fasteners

Built-in Check Valve

ACCESSORIES

Suction Hose Kit: Built-in 2" NPTF swivel fitting and 2" NPTM fitting for easy hookup; coil-reinforced wall prevents collapse; includes aluminum suction screen to prevent debris from reaching pump

Discharge Hose Kit: Built-in


2" NPTF swivel fitting and 2" NPTM fitting for easy hookup; collapsible for easy roll-up and storage; reinforced wall adds durability




PRO-SOURCE® Pumper Series


Engine-driven pumps

PUMP PERFORMANCE

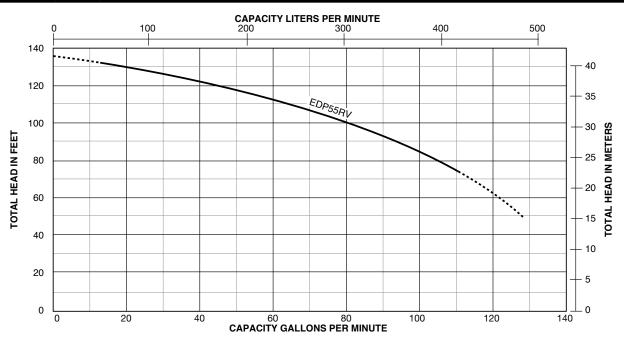

OUTLINE DIMENSIONS







US: 293 WRIGHT STREET, DELAVAN, WI 53115 WWW.STA-RITE.COM PH: 888-782-7483 ORDERS FAX: 800-426-9446 CANADA: 490 PINEBUSH ROAD, UNIT 4, CAMBRIDGE, ONTARIO N1T 0A5 PH: 800-363-7867 ORDERS FAX: 888-606-5484 Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.