


MINI GUIDE BLOCK & RAIL



MRS20, MR-20CS






MR-20CS



MRS-20

- Perfect for small stroke application.
- No grease needed.

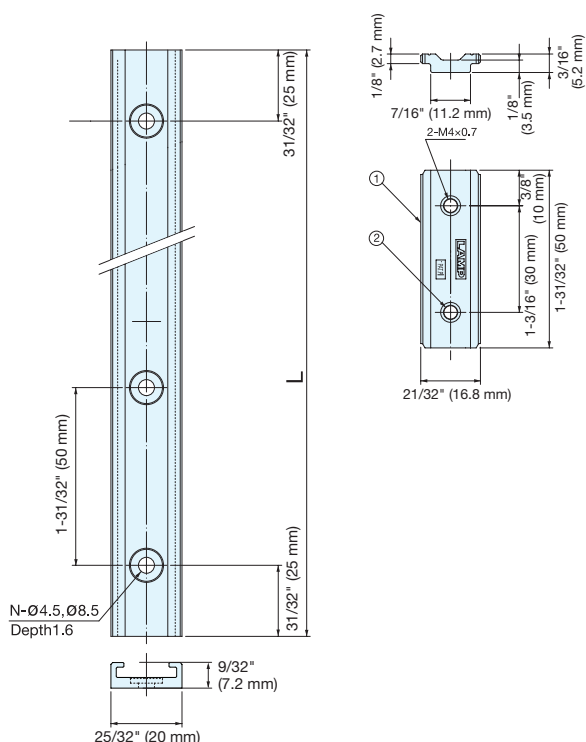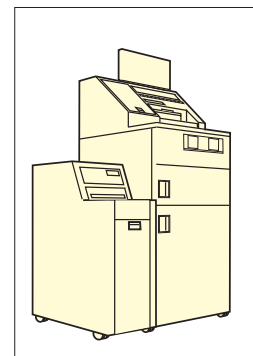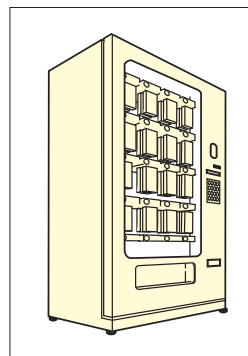

Material	Finish
Aluminum	Anodized

*Both ends are not anodized.

No.	Material	Finish
①	Polyethylene (UL 94HB)	Grey
②	304 Stainless Steel	Plain



Block

Item No.	Weight (g)	Box (pcs)	Carton (pcs)
MR-20CS	7	50	1000

Rail

Item No.	L	N	Weight (g)	Box (pcs)
MRS20-100	3-15/16" (100 mm)	2	20	200
MRS20-200	7-7/8" (200 mm)	4	40	
MRS20-400	15-3/4" (400 mm)	8	80	100
MRS20-800	31-1/2" (800 mm)	16	160	80
MRS20-2000	78-47/64" (2000 mm)	40	400	30

MRS 20, MR-20CS LOAD RATING INFORMATION

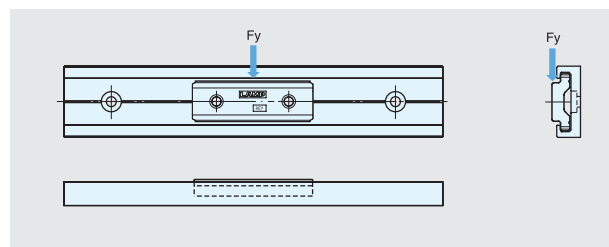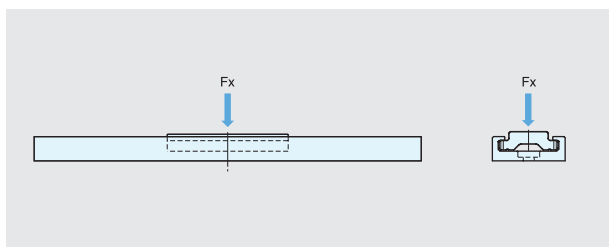

Horizontal Static Load Fx	30.6 kgf (67.5 lbs)
Vertical Static Load Fy	17.8 kgf (39.2 lbs)

◆ Reduction Factor

Certain reduction needs to be applied depending on application or environment.
 Low speed/Low operation frequency=70% to 100% of Load Rating
 Moderate speed/High operation frequency=35% to 65% of Load Rating
 High operation frequency with Vibration & Shocks=10% to 30% of Load Rating