

# Accuride®


**MODEL 3600-200**  
with 32 mm System Holes

**MODEL 3600-201**  
StowAway Slide  
Bracket Mount, Self-Closing  
175 lbs.\* [80 kg.] Capacity

**APPLICATIONS:** Use in kitchen and utility rooms for trash can pull-outs, storage shelves, and pantries. **This product is covered by U.S. (6,145,945) and various foreign patents issued and/or pending.**

## 3600-200/3600-201 QUICK REFERENCE

Total Side Space for 200: .83" x 2 with bracket  
Total Side Space for 201: 1.59" x 2  
Length: 22"  
Slide Dimensions for 200: 1.52" x 2.15"  
Slide Dimensions for 201: 2.28" x 2.20"  
Load Rating: 175 lbs.

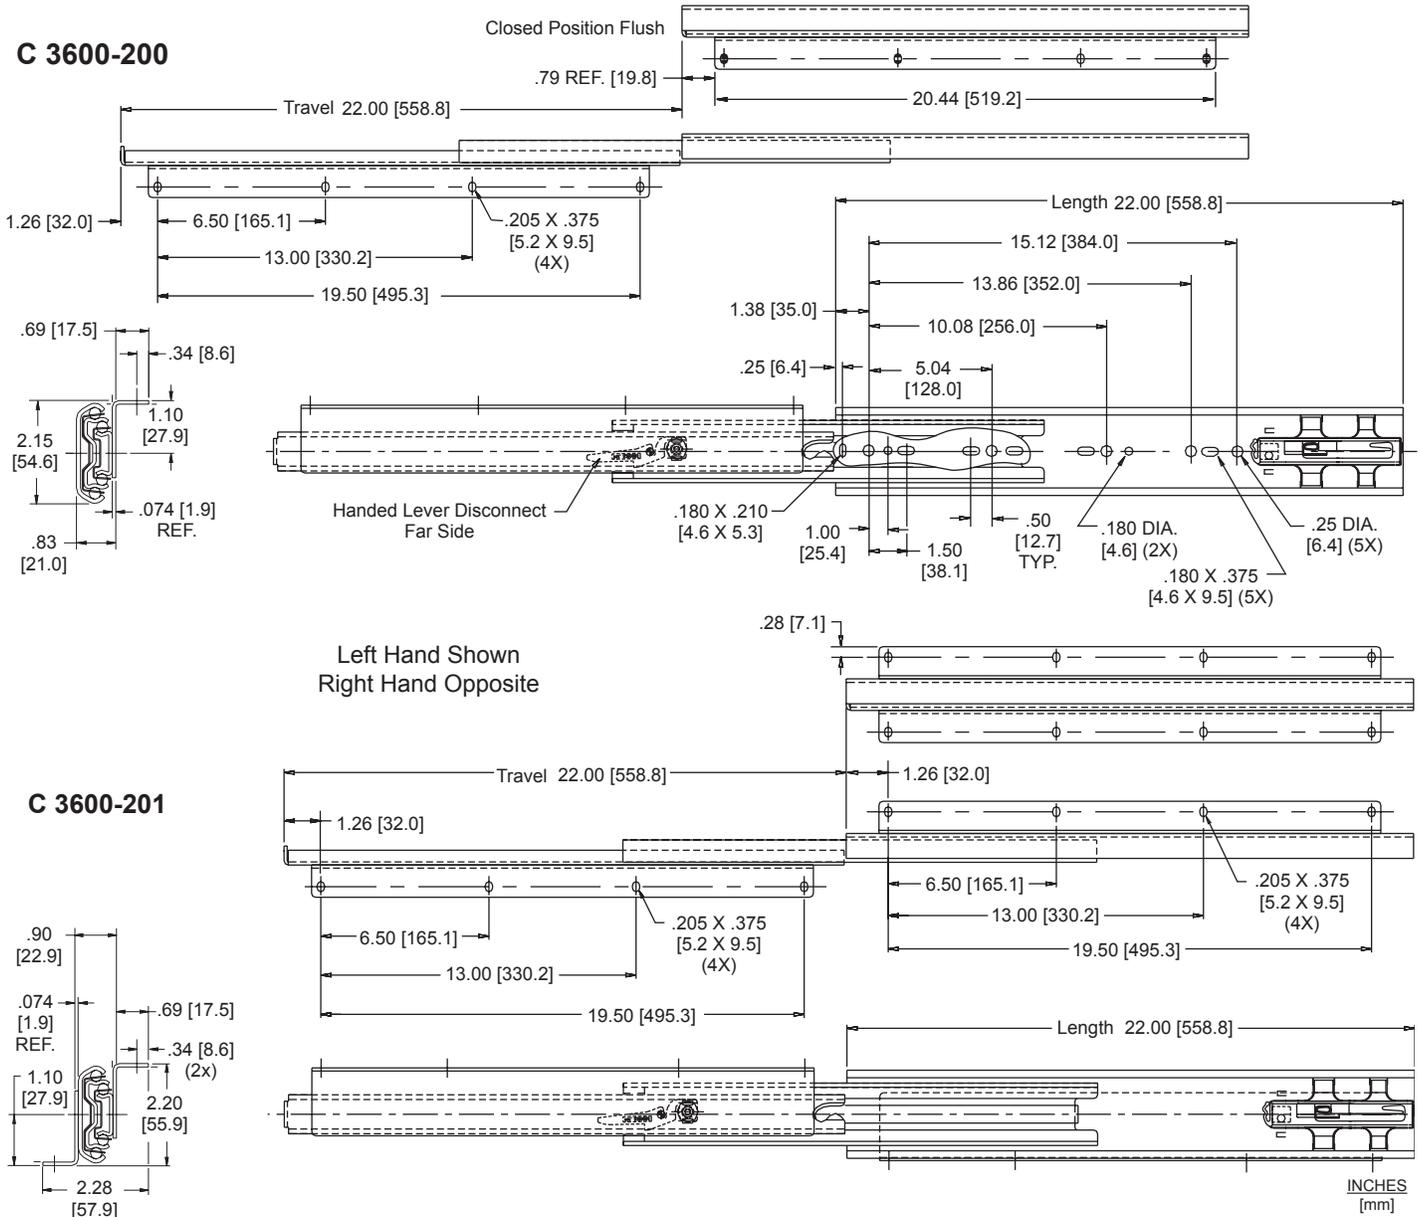

<b>Finish</b>	Bright electro-zinc (C) plating only
<b>Length</b>	22" [559 mm] only
<b>Travel</b>	Full extension
<b>Height</b>	3600-200 with bracket: 2.15" [54.6 mm] 3600-201 with brackets: 2.20" [55.9 mm]
<b>Side Space</b>	3600-200 with bracket: .83" [21.0 mm] 3600-201 with brackets: .90" [22.7 mm]
<b>Load</b>	175 lbs. [80 kg.] per pair*

<b>Mounting</b>	3600-200: Fixed inboard bracket 3600-201: Fixed inboard top bracket and fixed outboard bottom bracket
<b>Hardware</b>	Through slide: #8 truss head screw Through brackets: #10 pan head screws
<b>Features</b>	Handed slide. Self-close action eliminates bounce-back and drawer creep. Handed lever disconnect. Silencing open and closed.

\* Load rating based on an 18" slide on a 42" wide drawer cycled 75,000 times.

# Installation Instructions

## Model 3600-200

### Fixed Inboard Mounting Bracket

- To ensure proper operation of the slide, make certain all mounting screws are inserted so the screw heads are inside the slides.

**NOTE:** Secure slides using all mounting holes on the slide and on the bracket.

- With the slides fully extended, install slide outer members (largest) into cabinet using #8 screws (or 6 mm System screws, not provided by Accuride). Be sure slides are parallel.
- With slides extended, center the platform and drive the #10 screws up through the moving member brackets into the bottom of the platform.
- Adjust slide position until movement is smooth. Tighten all screws to complete installation.

## Model 3600-201

### Fixed Inboard Top Mounting Bracket and Fixed Outboard Bottom Mounting Bracket

- Mark a line at least .34" [8.6 mm] in from the right side of the cabinet opening and parallel to the cabinet side.
- Locate a point on this line 1.26" [32.0 mm] back from the desired front of the slide.
- Using #10 screws, mount the cabinet member bracket through the first hole at this point.
- Mount the left hand slide similarly, locating the screw center line of the cabinet member bracket at least .34" [8.6 mm] in from the left side of the opening.
- Keeping the right and left hand slides parallel, install the remainder of the cabinet member screws.

**NOTE:** Secure slides using 4 screws per bracket.

**NOTE:** When using soft material such as particle board, replace the rear cabinet mounting screws with through bolts.




- With slides extended, center the platform and drive the screws up through the moving member brackets into the bottom of the platform.

## Slide Ordering Instructions

Complete your order for Accuride model 3600-200 or 3600-201 by specifying the following. Slides are handed. Ordered as pairs.

	4 Pair	C	3600-200	D
Total Slides Required	_____	_____	_____	_____
Slide Finish	_____	_____	_____	_____
Slide Model With Fixed Inboard Bracket	_____	_____	_____	_____
Optional Polybag Packaging	_____	_____	_____	_____

	4 Pair	C	3600-201	D
Total Slides Required	_____	_____	_____	_____
Slide Finish	_____	_____	_____	_____
Slide Model With Fixed Inboard Top Bracket and Fixed Outboard Bottom Bracket	_____	_____	_____	_____
Optional Polybag Packaging	_____	_____	_____	_____

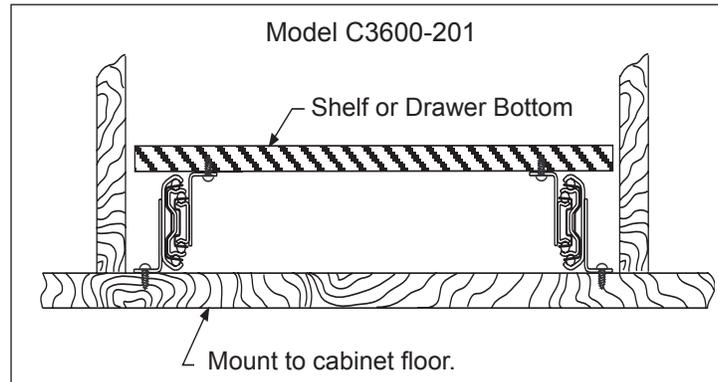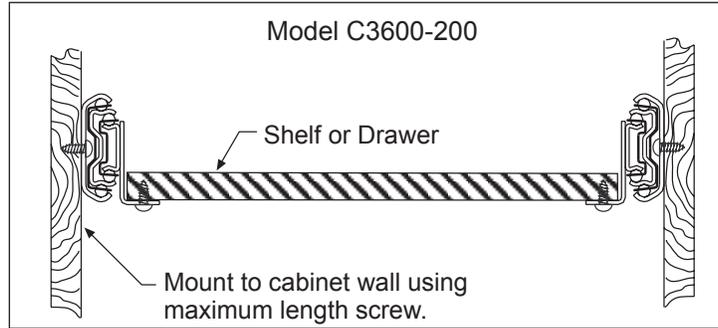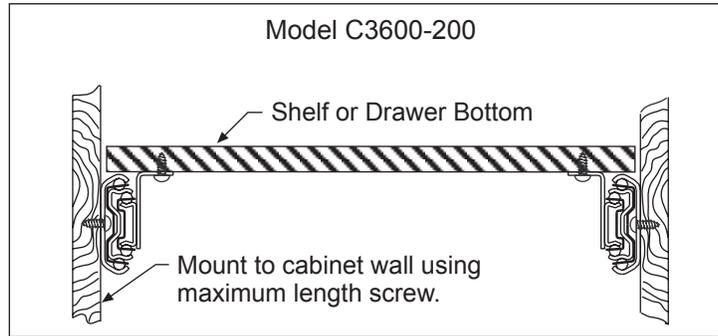

## Packaging

Models C3600-200 and C3600-201 are available in distributor packaging only.

**Distributor (D) Pack:** Packaged 4 pair per box. Polybag includes 1 pair of slides packed with mounting screws.

## Specifications

Slide members: Cold rolled steel

Ball retainers: Cold rolled steel

Ball bearings: Carburized steel

**NOTE:** Specifications, materials, prices, terms, and delivery are subject to change without notice.

# Accuride

ACCURIDE INTERNATIONAL INC.

12311 Shoemaker Avenue  
Santa Fe Springs, CA 90670

TEL (562) 903-0200

FAX (562) 903-0208

www accuride.com

Manufacturing, Engineering, and Sales

United States • Germany • Japan • Mexico • United Kingdom • China

Copyright © 2007 Accuride International Inc. 3700-9459(1096)-MK093-R3-1007